



Guangxi LiuGong Machinery Co.,Ltd.
No. 1 Liutai Road, Liuzhou, Guangxi.
545007

PR China

T: +86 0772 3886124

E: overseas@liugong.com

HQ: www.liugong.com

MH: www.lgforklift.cn

Like and follow us:



LIUGONG 122018-ENG

The LiuGong series of logos herein, including but not limited to word marks, device marks, letter of alphabet marks and combination marks, as the registered trademarks of Guangxi LiuGong Group Co., Ltd. are used by Guangxi LiuGong Machinery Co., Ltd. with legal permission, and shall not be used without permission. Specifications and designs are subject to change without notice. Illustrations and pictures may include optional equipment and may not include all standard equipment. Equipment and options varies by regional availability.

CLG2100H-120H

CONTAINER UNSTUFFING FORKLIFT



LIUGONG



TOUGH WORLD. TOUGH EQUIPMENT.

MAXIMIZE YOUR RETURN ON INVESTMENT

CONCISE AND EASY TO USE

The design of the whole machine is simple and clear, and the outline lines are simple and durable.

Open console, spacious and comfortable.

The new joystick is placed on the right side of the seat to keep you at your fingertips.



ERGONOMIC

Select the most reliable engine, drive axle, transmission and hydraulic components in the industry.

Double filter air filter with cyclone dust collector, the air is clean and more durable for the engine.

Adopt a series of waterproof, dustproof and centralized control fuse box design.

The whole machine undergoes high-strength intensification test to ensure the maximum service life of the whole machine.





FLEXIBLE AND COMPACT

Can easy enter the container for handling operation with its campact body.

Standard front view imaging equipment for safety and efficiency.

Standard integral side shifter, convenient and flexible.



AFTER SALES SERVICE

As a customer of LiuGong you can feel confident that our dealers and regional offices will be there to support you with training, service and maintenance needed throughout the life of your machine.

MAINTAINING

The engine hood and rear hood with big angle for easy to maintain.



PARTS

Using genuine LiuGong parts is key to keeping your costs low and your machine in top working order. Our extensive support network is always there when you need it, to maximize your business profitability.





SPECIFICATION

General	Model	1			CLG2100H
	Power Type	2			Diesel
	Base Capacity	3	@rated load center	kg	10,000
	Load Center	4		mm	600
Weights	Service Weight	5	unloaded	kg	12,160
	Axle Load	6	loaded / unloaded, front	kg	19,660 / 5,160
		7	loaded / unloaded, rear	kg	2,500 / 7,000
Tires	Tire Type	8			Pneumatic
	Wheels	9	front / rear		4 / 2
	Wheelbase	10		mm	2,800
	Tire Size	11	front		9.00x20-14PR
		12	rear		9.00x20-14PR
Mast	Tread Width	13	front / rear		1,440 / 1,720
	Max. Fork Height	14	with std 2-stage mast	mm	2,000
	Free lift	15	with std 2-stage mast	mm	1,100
	Height, Upright Lowered	16	with std 2-stage mast	mm	2,230
	Height, Upright Extended	17	with std 2-stage mast	mm	3,430
	Mast Tilt, Fwd/Back	18	with std 2-stage mast	deg	6° / 12°
	Carriage	19	width	mm	1,800
	Fork Spread	20	minimum / maximum	mm	430~1,720
	Fork Dimensions	21	T x W x L	mm	87×200×1,500
	Length to Fork Face	22	with std 2-stage mast	mm	4,460
Chassis	Overall Width	23		mm	2,000
	Overhead Guard Height	24		mm	2,225
	Turning Radius	25	minimum outside	mm	4,060
	Fork Overhang	26	with std 2-stage mast	mm	830
	Right Angle Stack	27	add load length and clearance	mm	6,180
	Ground Clearance	28	minimum loaded	mm	240
		29	center of wheelbase	mm	300
		30			
Performance	Travel Speed	30	loaded / unloaded	km/h	23 / 28
	Lift Speed	31	loaded / unloaded	m/s	350 / 370
	Lower Speed	32	loaded / unloaded	m/s	400 / 360
	Max. Drawbar Pull	33	loaded	kg	7200
	Max. Gradeability	34	loaded / unloaded	%	30
Systems	Brakes	35	service		Foot / Hyd
		36	parking		Hand / Mech
		37	manufacturer		Yuchai
		38	model		YC4A125-T300
	Engine	39	emission compliance		CHN Stage III
		40	cylinders		6
		41	displacement	liters	6.494
		42	rated power	kW/rpm	92
		43	Max. torque	N · m/rpm	525 / 1,500

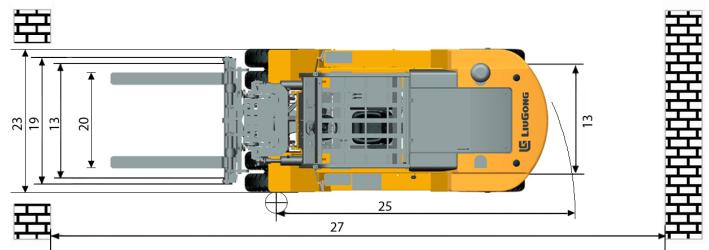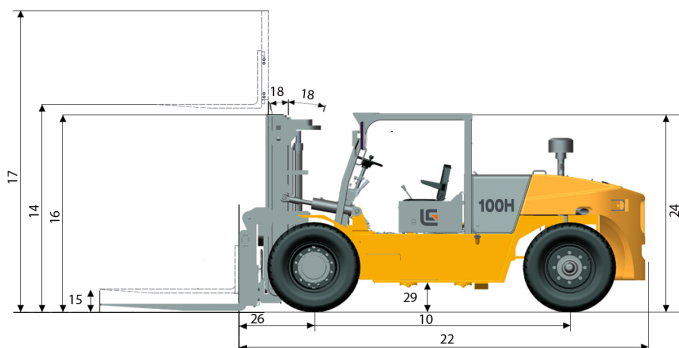


SPECIFICATION

General	Model	1			CLG2120H
	Power Type	2			Diesel
	Base Capacity	3	@rated load center	kg	12,000
	Load Center	4		mm	600
Weights	Service Weight	5	unloaded	kg	12,760
	Axle Load	6	loaded / unloaded, front	kg	20,160 / 5,020
		7	loaded / unloaded, rear	kg	2,600 / 7,740
Tires	Tire Type	8			Pneumatic
	Wheels	9	front / rear		4 / 2
	Wheelbase	10		mm	3,000
	Tire Size	11	front		9.00x20-14PR
		12	rear		9.00x20-14PR
Mast	Tread Width	13	front / rear		1,440 / 1,720
	Max. Fork Height	14	with std 2-stage mast	mm	2,000
	Free lift	15	with std 2-stage mast	mm	1,100
	Height, Upright Lowered	16	with std 2-stage mast	mm	2,230
	Height, Upright Extended	17	with std 2-stage mast	mm	3,430
	Mast Tilt, Fwd/Back	18	with std 2-stage mast	deg	6° / 12°
	Carriage	19	width	mm	1,800
	Fork Spread	20	minimum / maximum	mm	430~1,720
	Fork Dimensions	21	T x W x L	mm	87×200×1,500
	Length to Fork Face	22	with std 2-stage mast	mm	4,460
Chassis	Overall Width	23		mm	2,000
	Overhead Guard Height	24		mm	2,225
	Turning Radius	25	minimum outside	mm	4,350
	Fork Overhang	26	with std 2-stage mast	mm	830
	Right Angle Stack	27	add load length and clearance	mm	6,470
		28	minimum loaded	mm	240
	Ground Clearance	29	center of wheelbase	mm	300
		30	loaded / unloaded	km/h	23 / 28
Performance	Lift Speed	31	loaded / unloaded	m/s	310 / 350
	Lower Speed	32	loaded / unloaded	m/s	350 / 320
	Max. Drawbar Pull	33	loaded	kg	7200
	Max. Gradeability	34	loaded / unloaded	%	27
Systems	Brakes	35	service		Foot / Hyd
		36	parking		Hand / Mech
		37	manufacturer		Yuchai
		38	model		YC4A125-T300
	Engine	39	emission compliance		CHN Stage III
		40	cylinders		6
		41	displacement	liters	6.494
		42	rated power	kW/rpm	92
		43	Max. torque	N · m/rpm	525 / 1,500

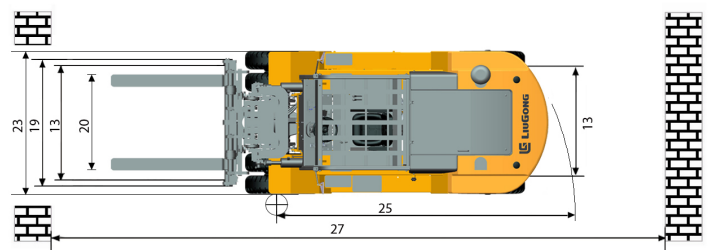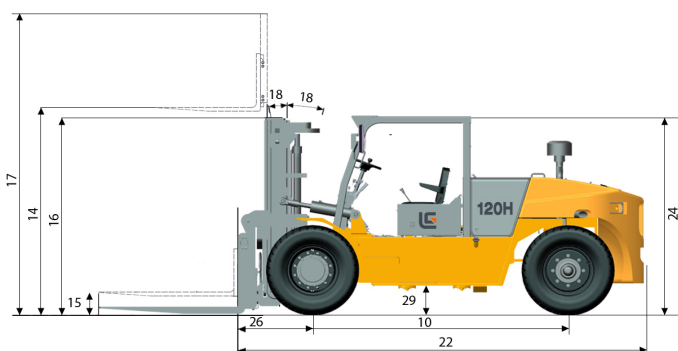

APPLICATION

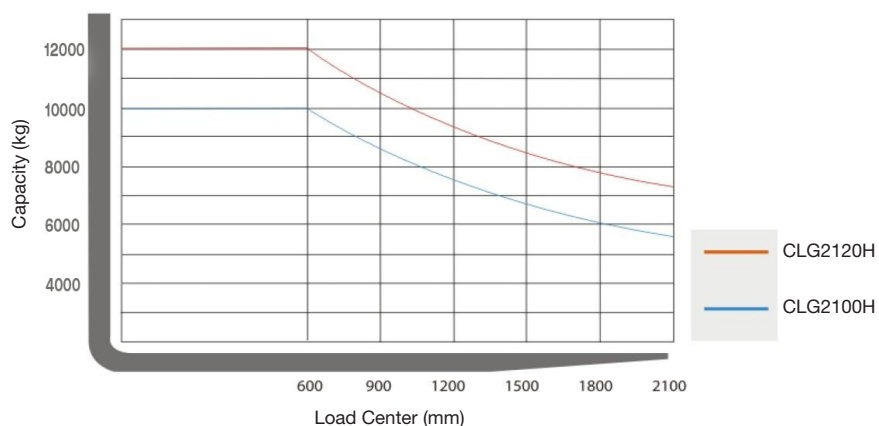

Note:

Vertical axle stands for load capacity while horizontal axle stands for load center, Load center is the distance counted from the front of the fork. The base point of the standard load is the center point of the cubic with the same 1200mm dimension in length, width and height. The load capacity should be down if mast tilt forward or using non-standard forks of loading goods with extra width. Please realize the different load capacity between different load centers according to load chart.

STANDARD CONFIGURATION

POWER SYSTEM

- Yuchai 4A125-T300 diesel engine
- Two-speed automatic transmission
- High strength drive axle
- Heavy duty steering axle
- Elevated air pre-cleaner
- Fuel system pre-filter
- Radiator
- Middle exhaust

HYDRAULIC SYSTEM

- 2-function hydraulic valve
- Hydrostatic steering
- Oil filter for intake and return

ELECTRIC SYSTEM

- 2 batteries
- Front flood lights
- Front steering lights
- Rear combination lights
- Rear working lights
- Buzzer for back off

UNDERCARRIAGE

- High strength frame
- 1 piece counterweight
- Tow pin
- Air filled pneumatic drive tires
- Air filled pneumatic steer tires

MAST

- 2.0M Full free 2-stage mast
- 1800mm Wide shaft type carriage
- Load backrest
- 1500mm long shaft type pallet forks

OPERATOR STATION

- Overhead guard
- Locks for engine hood
- Vinyl cushion seat with seat belt
- Ignition lock
- Display with alarms, fuel rate, water temperature, working hour
- Tilt steering column
- Inching, brake and accelerator pedals
- Hand parking
- Floor mat
- Hydraulic electronic shifting
- Front view imaging equipment

OPTIONAL CONFIGURATION

HYDRAULIC SYSTEM

- 3-function hydraulic valve
- 4-function hydraulic valve

ELECTRIC SYSTEM

- Amber warning light
- License plate light

UNDERCARRIAGE

- Solid pneumatic drive tires
- Solid pneumatic steer tires

MAST

- Longer shaft type pallet forks

OPERATION STATION

- Fire extinguisher
- Protective cover for tilt cylinder
- Master key
- Half-suspension vinyl seat(tiancheng)
- Grammer full-suspension vinyl seat